


NORWEGIAN WOOD

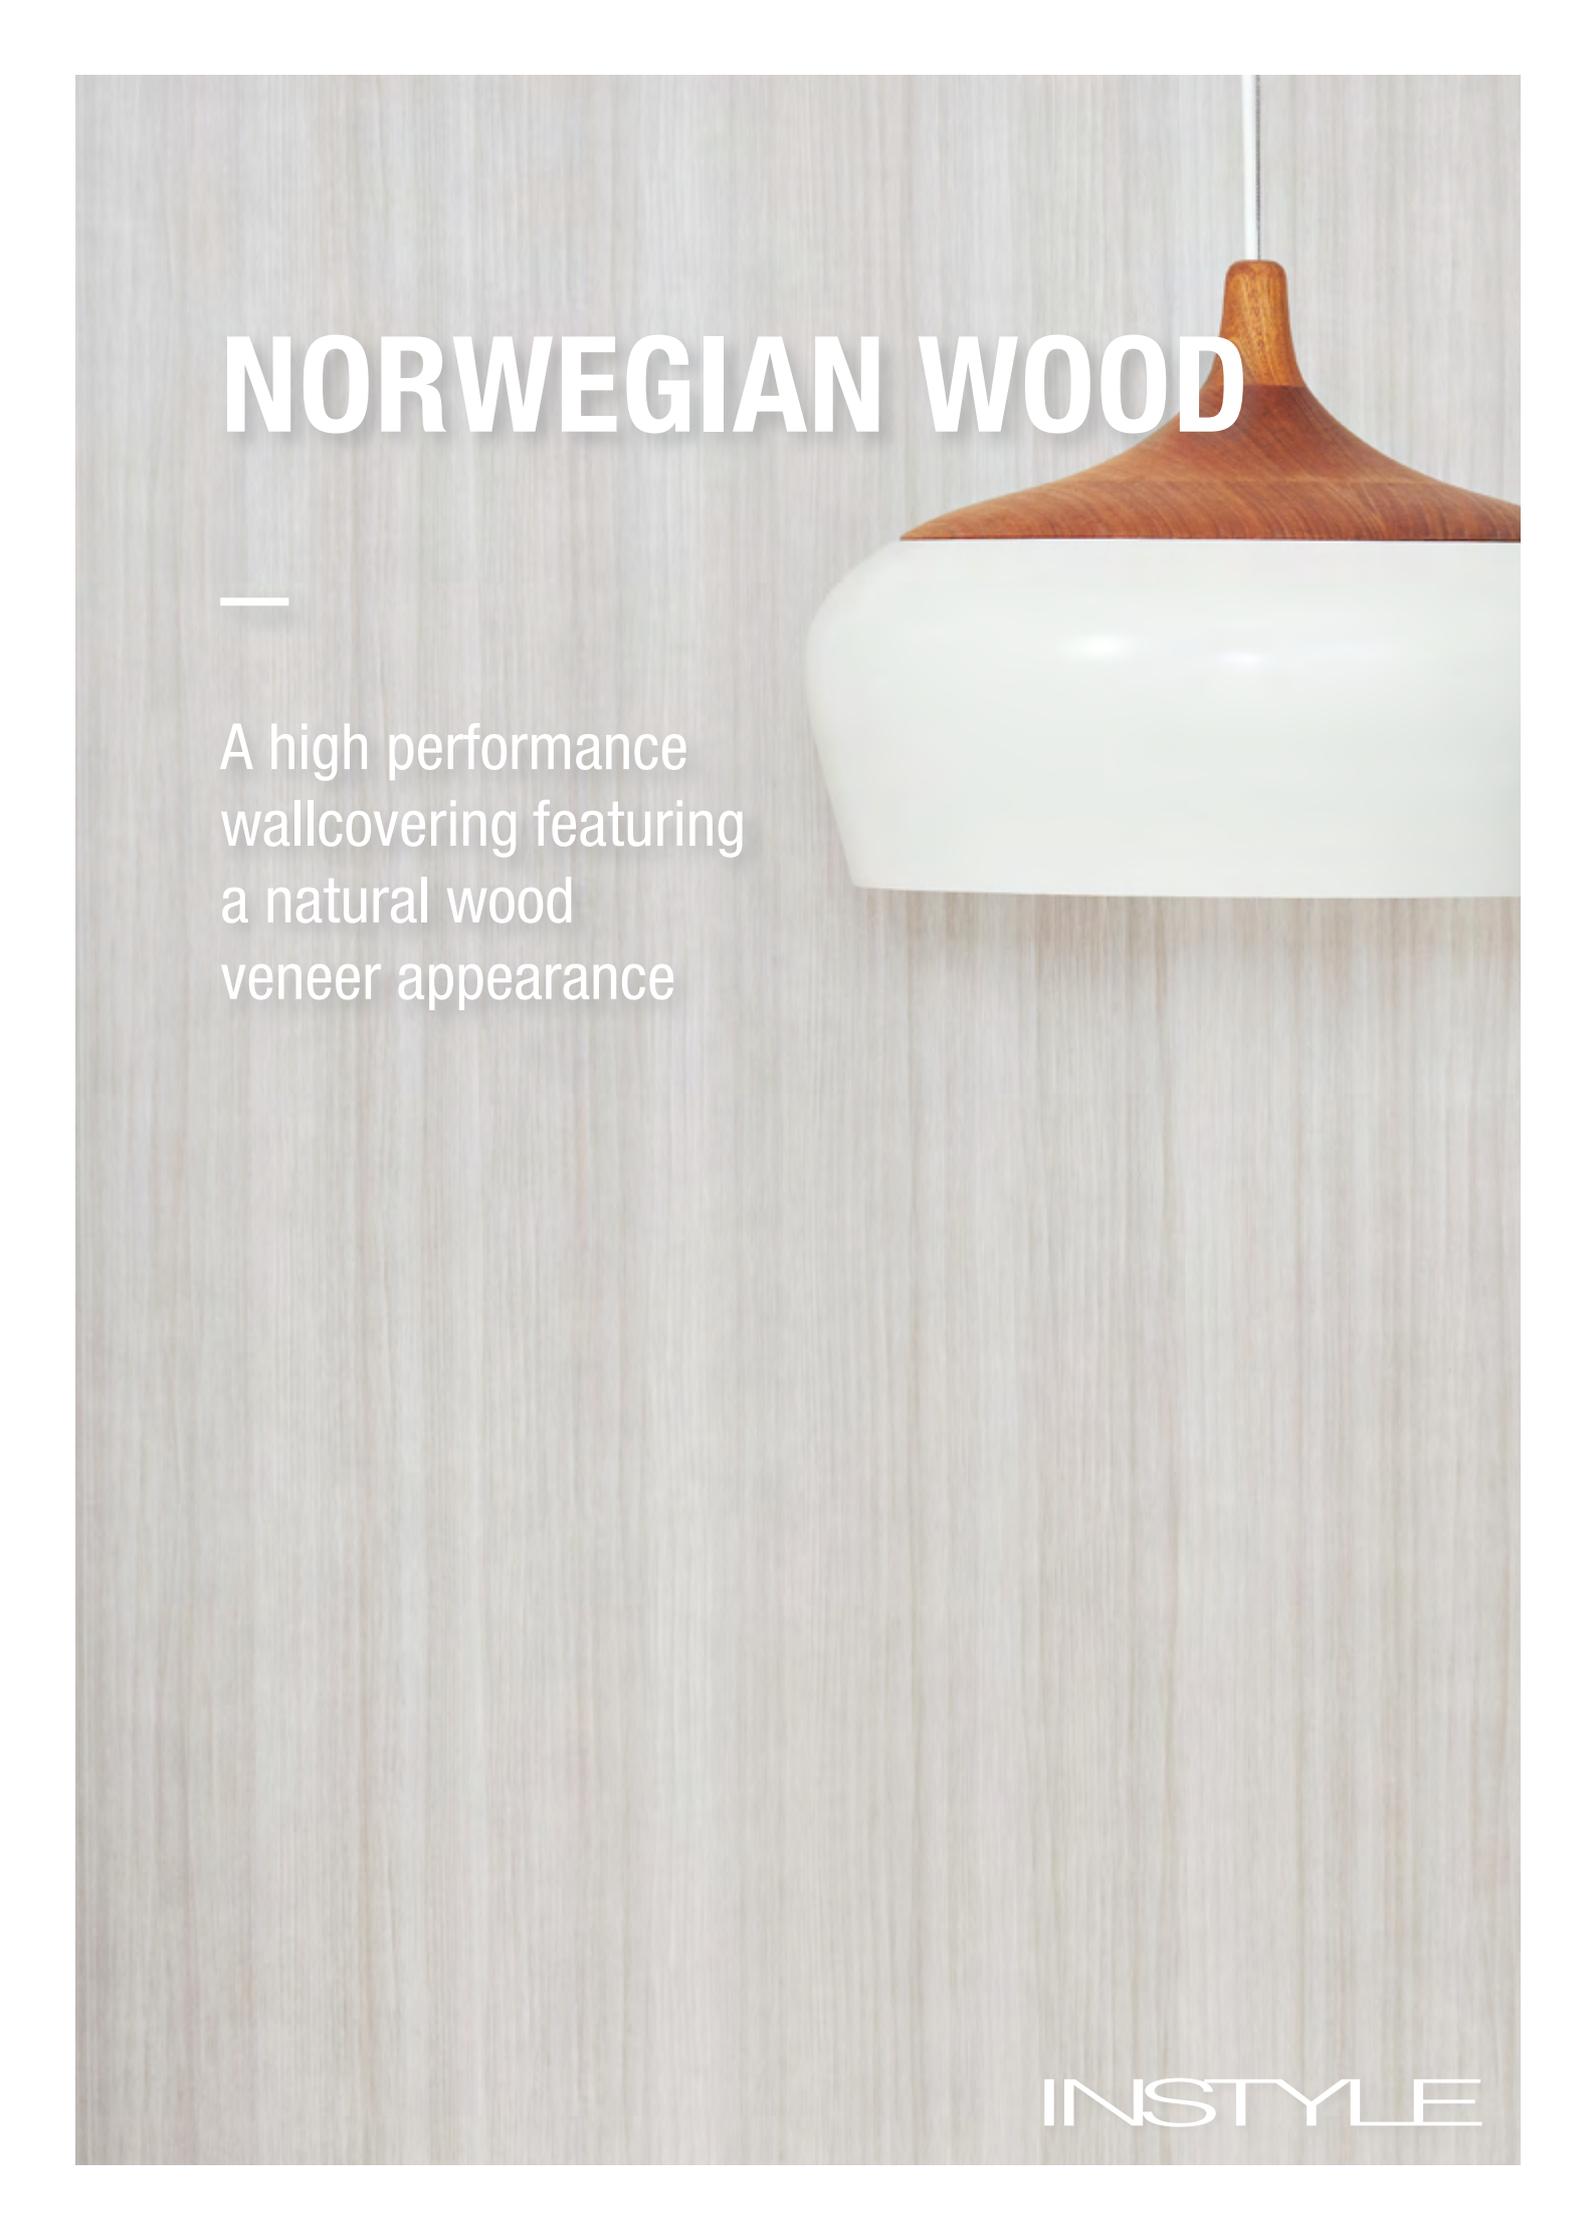

A high performance
wallcovering featuring
a natural wood
veneer appearance

INSTYLE

NORWEGIAN WOOD



Gardenia NW-002



Astoria NW-004



Majestic NW-003



Odeon NW-011



Pavilion NW-005



Oasis NW-007



Granada NW-010



Casbah NW-009



Star Club NW-001



La Scala NW-006



Gaumont NW-012



Cavern NW-008

Patterns shown are not to scale
Product may vary in colour due to the nature of the media
Please refer to website for current colour range



FACE COMPOSITION	vinyl (PVC)
BACKING TYPE	non-woven
WIDTH	137cm
WEIGHT	452gsm / 619g lineal m
PATTERN REPEAT	non-match
ROLL SIZE	27.4m approx. Note: minimum order quantity is 10.9m and 0.9m multiples
PERFORMANCE	Type II Wallcovering
FIRE RATING AS/NZS 3837 AS 5637.1	BCA Group 2 Av. Specific Extinction Area 51.3 m2/kg
ISO 5660.1	NZBC Group 2S Av. Specific Extinction Area 5.2 m2/kg
Additional Fire Tests	ASTM E-84 Tunnel Test Class A
PLEASE NOTE	Results from performance tests are guidelines only

PRODUCT INSTALLATION

- Please refer to installation instructions for NORWEGIAN WOOD supplied with each shipment. A copy is also available on our website.
- All material must be installed in numerical sequence as cut from the roll.

CARE + MAINTENANCE

- General maintenance can be achieved with periodic dusting or vacuuming with a soft brush attachment.
- Remove ordinary dirt and smudges with a mild soap and warm water solution. Always test the solution on an inconspicuous portion of the wallcovering before proceeding, checking that there is no adverse effect on finish, colour or gloss. Care should be taken on dark colours due to the possibility of causing 'light marks'. Always use a blotting action rather than rubbing to avoid abrasion. Rinse thoroughly with clean water from the top down using a sponge.
- Deeply embossed wallcoverings need extra attention in case suds or loosened dirt lodge in depressed surfaces.
- Dry wallcovering with a soft lint free cloth or towel.
- Please refer to the NORWEGIAN WOOD care instructions for further details. A copy is available on our website.

WARRANTY

- For a period of 3 years from date of invoice this wallcovering is guaranteed to be first quality and free of manufacturing defects. This warranty applies only to professionally applied installations according to the recommended installation instructions, and proper care and maintenance using appropriate cleaning agents as outlined in the care instructions.

