


Ecoustic® Neilson Tile Installation + Care

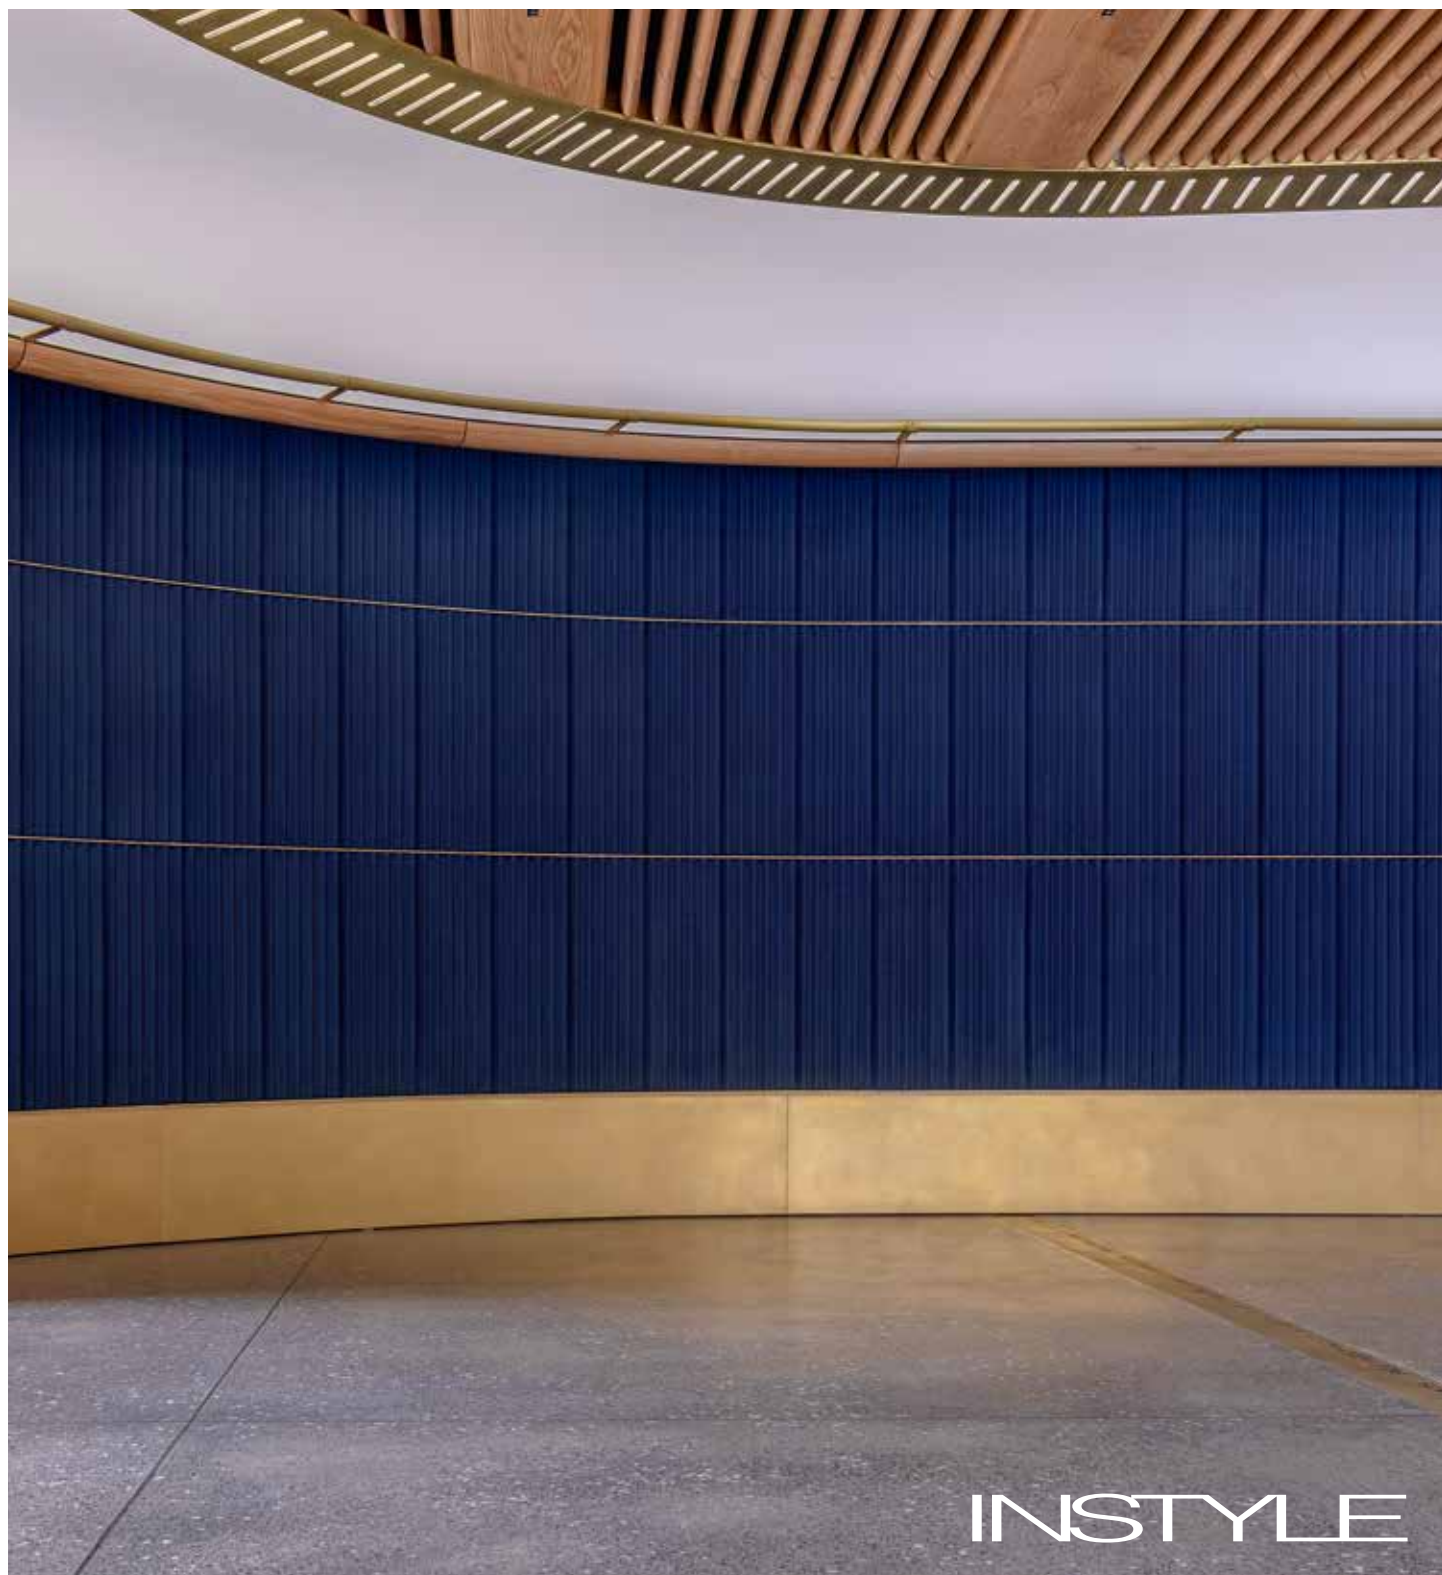


INSTYLE

Ecoustic® Neilson Tile Installation


ASSEMBLY INSTRUCTIONS

Supplied




8 x Ecoustic® Neilson tiles
Sold in packs of 8 per colour
13 x 4-way joiner clips (inc. 1 spare)
Clip template
Installation instructions

Source



Flat-head c/sunk
25mm (1") 10g
[4-8 per tile]




Power drill

Essential



Clean hands
Handle with care
during installation




Spirit level

WALL INSTALLATION


Step 1

Draw a datum line on the wall and mark the setout point in which the tiles are to be installed.

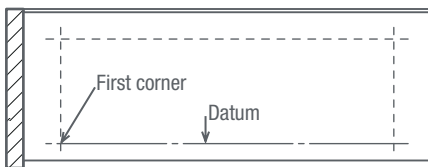

Step 2

Using fixings suitable for your substrate, fix the first corner in place.
Note: Always use a mechanical means of fixing.

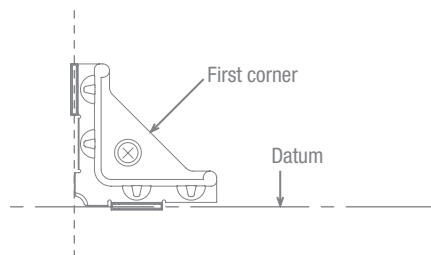


Step 3

Use the supplied template to fix the next 6 clips in place.



Step 4

Using the template work your way up the wall in columns. Finish the top with corner clips on corners + edge clips on straight joins.
Note: never use the tiles to measure spacing.

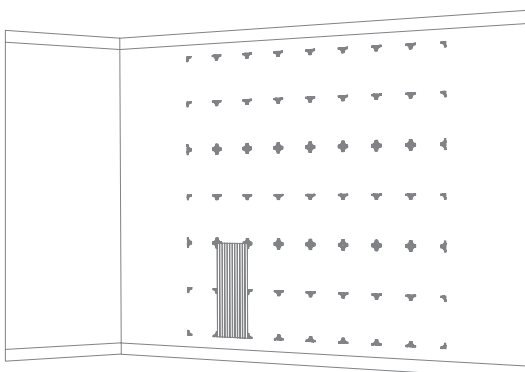


Step 5

Once you have two columns up, double check your spacing by installing the first column of tiles. Always stay one column ahead of the installed tiles so the tiles don't interfere with the spacing.

Step 6

Install the rest of your clips and put up the tiles to finish.
For ceiling installations, we recommend the use of glue for additional fixing.

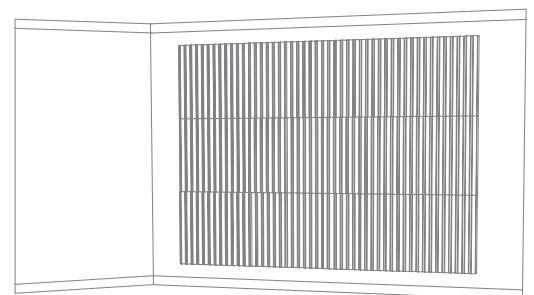


Ecoustic® Neilson Ceiling Installation

Ecoustic® Neilson has been designed as a wall tile though it can also be used for ceiling applications. Please follow the wall installation steps taking care to ensure clip fasteners are secured into suitable structural support, for eg. plaster anchors or ceiling frame members.

Minimum 1 mechanical fastener (flat head or countersunk) per ceiling tile recommended - passing through the tiles into installed clips.



Option 1 - External tile fasteners

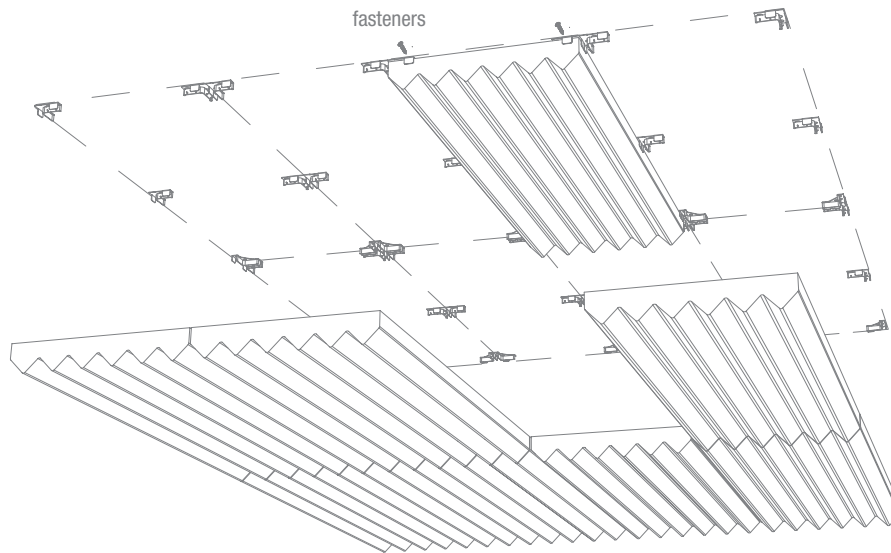

Option 2 - Internal tile fasteners

Mounting template with offset middle clip can be provided for ceiling installations

location of 1 x screw fixed per tile for ceiling mounting

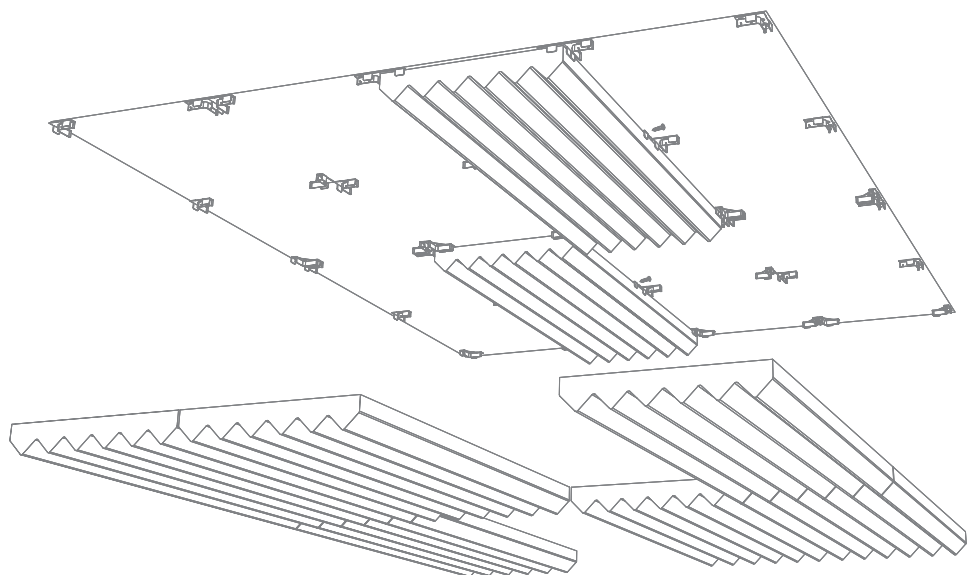

Ecoustic® Neilson Tile Care

Please Note

- Care must be taken when cleaning as these instructions apply to the fabric face only and the possible effect of the cleaning regime on underlying bases and wall surface must be considered
- For these reasons it is suggested to spot clean only and that it be carried out by a professional cleaner

Regular Care

- Protect from direct heat and sunlight
- To prevent dust build up, lightly dust with a soft cloth or vacuum with a soft brush attachment

Cleaning

- Professional cleaning is always recommended
- Always test any cleaning products on an inconspicuous area prior to commencing cleaning
- Blot any excess spills from the material with a dry clean sponge or cloth
- Treat all stains and spills as soon as possible
- Most marks can be spot cleaned by lightly wetting the affected area with a mild detergent and warm water solution
- Do not saturate the tile
- Do not scrub or abrade the tile surface as this will affect the surface finish
- Once the stain or mark has been loosened then blot the excess solution out with a dry clean sponge or cloth
- Sponge afterwards with clean warm water and dry any excess moisture with a dry clean sponge or cloth
- The product can also be spot cleaned with dry cleaning fluid, lightly sponge a small amount of dry cleaning fluid and blot
- Dry away from direct heat and sunlight
- Do not use carpet shampoo