


EDO SILK



A sophisticated and
luxurious wallcovering
with random natural slubs

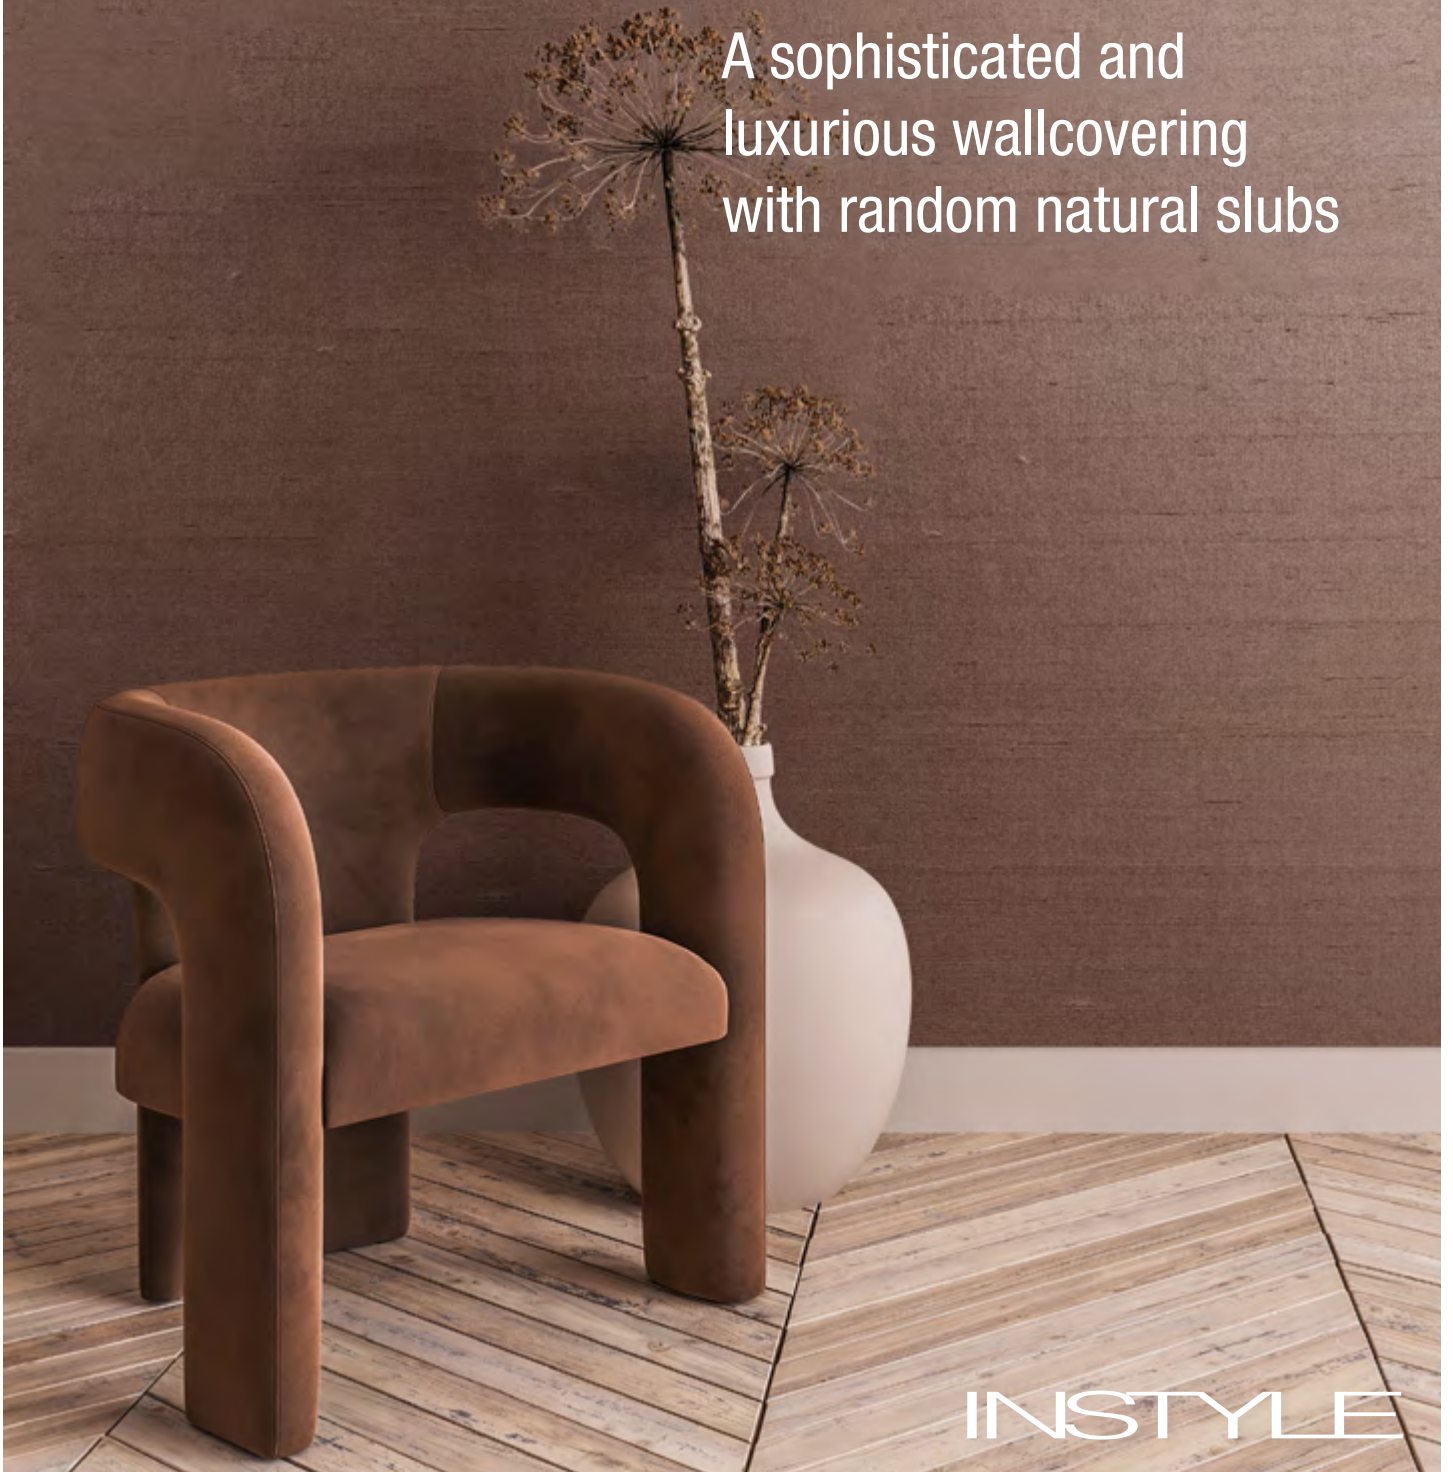

INSTYLE


EDO SILK



Dove EDO-001



Alabaster EDO-002



Marble EDO-003



Sterling EDO-012



Mist EDO-005



Seagreen EDO-014



Driftwood EDO-004




Toffee EDO-010



Raisin EDO-009

Patterns shown are not to scale
Product may vary in colour due to the nature of the media
Please refer to website for current colour range

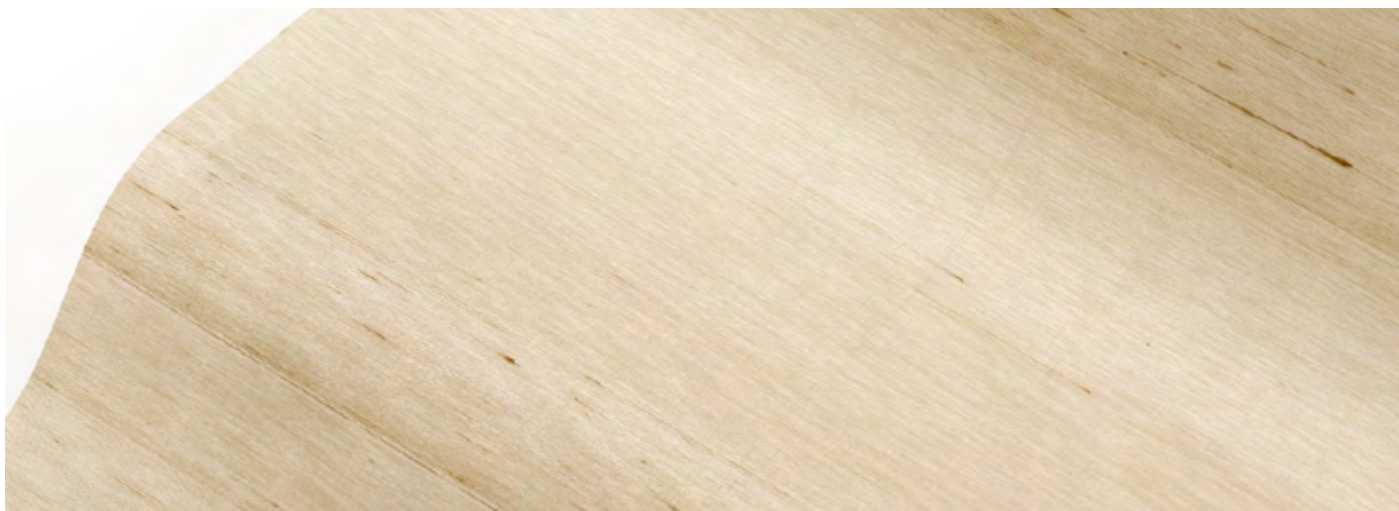

FACE COMPOSITION	100% silk
BACKING TYPE	paper
WIDTH	91cm
WEIGHT	158gsm / 145g lineal m
PATTERN REPEAT	non-match
ROLL SIZE	10.9m approx. Note: minimum order quantity is 10.9m and 3.6m multiples
PERFORMANCE	Type I Wallcovering
FIRE RATING AS/NZS 3837	BCA Group 1 Av. Specific Extinction Area 42.1m ² /kg
Additional Fire Tests	ASTM E-84 Tunnel Test Class A
PLEASE NOTE	EDO SILK may exhibit variations of colour and texture. This is integral to the beauty and character of the handcrafted organic material. Seams may be obvious upon installation and there will be a panelling effect.

ENVIRONMENT

- 100% rapidly-renewable content

PRODUCT INSTALLATION

- Please refer to installation instructions for EDO SILK supplied with each shipment. A copy is also available on our website.
- All material must be installed in numerical sequence as cut from the roll.

CARE + MAINTENANCE

- Due to the delicate nature of the finishes, care must be taken not to damage or mark the surface due to abrasion / rubbing.
- General maintenance can be achieved with periodic dusting or vacuuming with a soft brush attachment.
- Remove ordinary dirt and smudges with a mild soap and warm water solution.
- Always test the solution on an inconspicuous portion of the wallcovering before proceeding, checking that there is no adverse effect on finish, colour or gloss.
- Care should be taken on dark colours due to the possibility of causing 'light marks'. Always use a blotting action rather than rubbing to avoid abrasion.
- Rinse thoroughly with clean water from the top down using a sponge.
- Dry with a soft lint free cloth or towel.
- Avoid alcohol / solvent based cleaners.
- Please refer to the EDO SILK care and maintenance instructions for further details. A copy is available on our website.

WARRANTY

- For a period of 3 years from date of invoice this wallcovering is guaranteed to be first quality and free of manufacturing defects. This warranty applies only to professionally applied installations according to the recommended hanging instructions, and proper care and maintenance using appropriate cleaning agents as outlined in the care and maintenance instructions.

