


# **Agave**





## **Natural Wallcoverings**

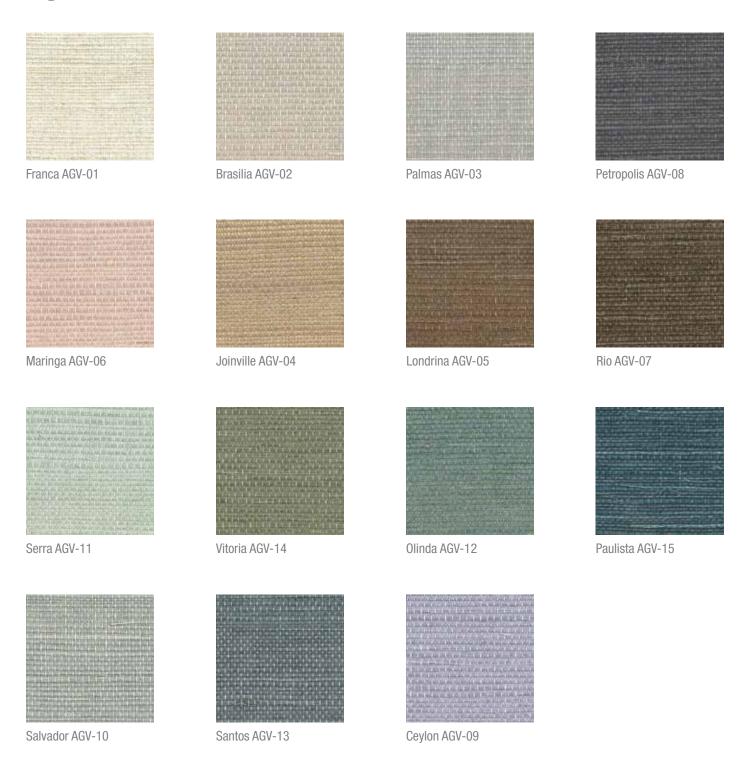

FACE COMPOSITION sisal + cotton yarn

BACKING TYPE paper

WIDTH 91cm

WEIGHT 203gsm / 186g lineal m

PATTERN REPEAT Non-match

ROLL SIZE 10.9m approx. NB: minimum order

quantity is 10.9m (full roll) +

3.6m multiples

PERFORMANCE Untyped Wallcovering

FIRE RATING

ASNZS 3837 (AS 5637.1) Group Number 1

Av. Specific Extinction Area 10.6m2/kg

ISO 5660.1 Group 1S

Av. Specific Extinction Area 13.6m2/kg

ASTM E-84 Tunnel Test Class A

PLEASE NOTE Agave may exhibit variations in

colour and texture. This is integral to the beauty and character of the handcrafted organic material. Seams may be obvious upon installation and there will be a

panelling effect.

### **ENVIRONMENT**

- Sisal is a natural fibre from the Agave plant cultivated in managed forests. Agave is permeable and aids in reducing mould and mildew.
- The wallcovering is free of chemical additives, PVC, chlorine, heavy metals + urea formaldehyde. Only water-based inks and coatings are used.







#### PRODUCT INSTALLATION

- Please refer to installation instructions for Agave supplied with each shipment. A copy is also available on our website.
- All material must be installed in numerical sequence as cut from the roll.

#### CARE + MAINTENANCE

- Due to the delicate nature of the finishes, care must be taken not to damage or mark the surface due to abrasion / rubbing.
- General maintenance can be achieved with periodic dusting or vacuuming with a soft brush attachment.
- Remove ordinary dirt and smudges with a mild soap and warm water solution.
- Always test the solution on an inconspicuous portion of the wallcovering before proceeding, checking that there is no adverse effect on finish, colour or gloss.
- Care should be taken on dark colours due to the possibility of causing 'light marks'. Always use a blotting action rather than rubbing to avoid abrasion.
- Dry with a soft lint free cloth or towel.
- Avoid alcohol / solvent based cleaners.
- Agave care and maintenance instructions are available on our website.

#### WARRANTY

For a period of 3 years from date of invoice this wallcovering
is guaranteed to be first quality and free of manufacturing
defects. This warranty applies only to professionally applied
installations according to the recommended hanging
instructions, and proper care and maintenance using
appropriate cleaning agents as outlined in the care and
maintenance instructions.

