

# **Ecoustic® Baayi**

When the dancing is over, an acoustic panel print by Wiradjuri artist Amanda Hinkelmann + Instyle Design Studio



# **Ecoustic® Baayi Colourways**

## ecoustic<sup>®</sup>




Baayi White on Natural White core




Baayi White on Lunar White core



Baayi Biscuit on Oyster White core




Baayi Flint on Vault Black core



Baayi Stone on Oatmeal White core

Patterns shown are not to scale Product may vary in colour due to the nature of the media Please refer to website for current colour range

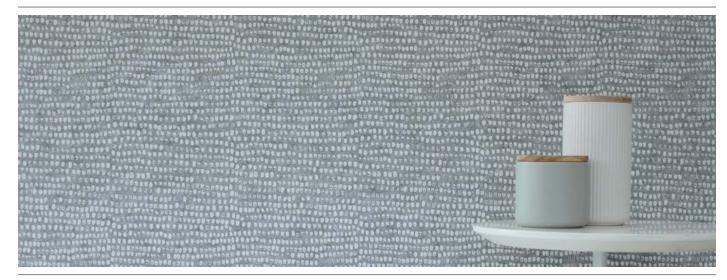

COMPOSITION 100% PET (up to 65% recycled PET) +

water-based ink

THICKNESS 8mm (stock item)

13.5mm\*, 25mm\*, 50mm\* + 12mm

Screen\*

PRINT DIMENSIONS Panel: 1200 x 2700mm approx.

Screen: 2400 x 1200mm approx.

PATTERN REPEAT H: 1200mm V: 2700mm

The pattern is railroaded for Ecoustic®

Screen

FIRE RATINGS AS/NZS 1530.3: 8mm, 13.5mm, 12mm

Screen

AS/ISO 9705 Group 1 (AS 5637.1) GB 8624-2012 Grade B1 (8mm Panel)

ACOUSTIC NRC 0.3 - 1.0 / aw 0.34 - 1.0

APPLICATION Screen, wall + ceiling panel

ORIGIN Made in Australia

EDGING Natural anodised aluminium edging are available for all Ecoustic® Panel

thicknesses + T Trims in natural

or black anodised

PLEASE NOTE Results from performance tests are

guidelines only.

Onsite trimming to square each individual panel is essential.

This is a screenl printed product.

Variation in thickness, fibre mix and colour as well as flecks + other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to

batch may occur.

Interior products must be protected from direct heat + sunlight.

WARRANTY 5 year conditional warranty against

manufacturing defects. This applies to internal installation only, outdoor use

will void any warranty.

#### **BENEFITS**

**Improved Pinability:** Ecoustic® Panel + Screen features an improved pinability compared to similar panel products.

**Lightweight, Easy to Handle + Install:** Ecoustic® is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

### **Designed for the Environment**



Giving Back: % of sales are donated to the Nature Conservancy.

**Building Rating Systems:** Ecoustic® Baayi will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green	LEED	WELL
	Star		
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	√	√	NA
EPD	√	√	NA
Declare Label	NA	√	√
<b>Greentag Level A Certification</b>	√	√	√
Toxic Material Reduction	NA	NA	√
Sound Reducing Surfaces 25mm + 50mm	NA	NA	√

HOW TO SPECIFY		
DESIGN	Ecoustic® Baayi	
PRODUCT	Panel (Single Side) or 12mm Screen* (Double Side)	
PANEL THICKNESS	8mm, 13.5mm*, 25mm* or 50mm* *minimums apply	
COLOUR	Select from Baayi colours	
EDGING	Optional extra - order separately	



The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.

