


Ecoustic® Plus

A timeless acoustic panel print designed by Michael Young




Colours ecoustic[®]

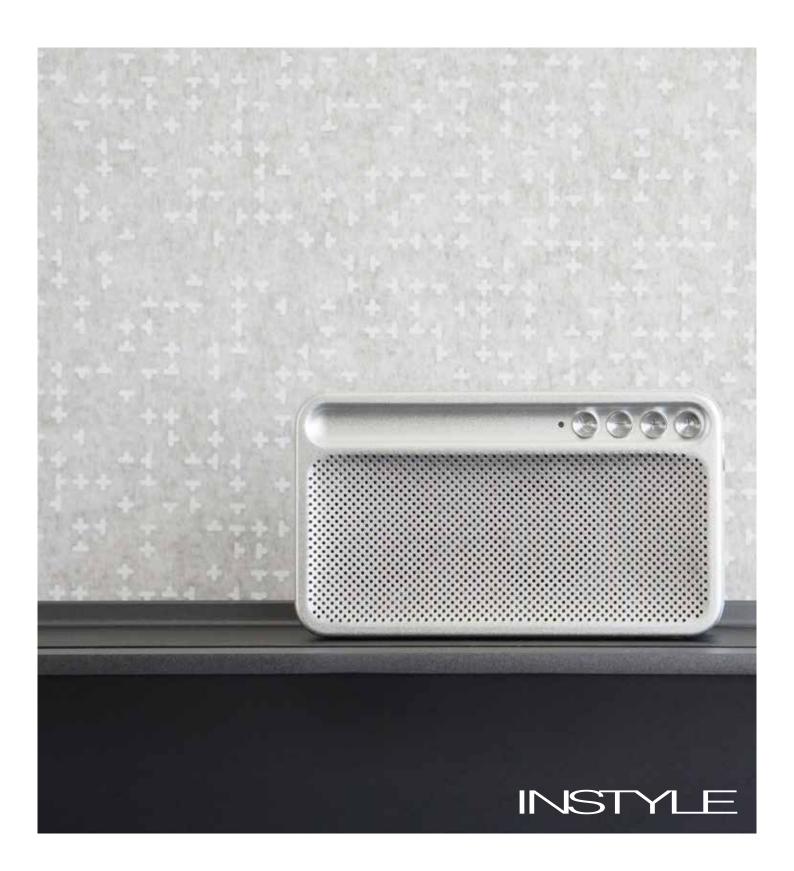


PLUS Silver on White



PLUS White on Natural



PLUS Petrol on Light Grey



PLUS Navy on Charcoal

Patterns shown are not to scale Product may vary in colour due to the nature of the media Please refer to website for current colour range



Ecoustic® Plus



COMPOSITION

100% PET (up to 65% recycled PET)

THICKNESS

8mm (stock), 13.5mm*, 25mm*, 50mm* + 12mm Screen*

PRINT DIMENSIONS

Panel: 1200 x 2700mm approx. Screen: 2400 x 1200mm approx.

PATTERN REPEAT

H: 1200mm V: 2700mm

PLUS is railroaded for Ecoustic® Screen

FIRE RATINGS

AS/NZS 1530.3 AS/ISO 9705 Group 1

GB 8624-2012 Grade B1 (8mm Panel) Refer to Ecoustic® Panel + Screen

specification

ACOUSTIC AS/ISO 354 NRC 0.3 - 1.0 / aw 0.34 - 1.0 Depending on panel thickness, refer to

Ecoustic® Panel + Screen information

APPLICATION

Screen, wall + ceiling panel

ORIGIN

Made in Australia

EDGING

Natural anodised aluminium edging are available for all Ecoustic® Panel thicknesses + T Trims in natural anodised or black powdercoat

PLEASE NOTE

Results from performance tests are

guidelines only

Onsite trimming to square each individual panel is essential This is a hand printed product. Variation in thickness, fibre mix and colour as well as flecks + other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to

batch may occur

Interior products must be protected from direct heat + sunlight

WARRANTY

5 year conditional warranty against manufacturing defects. This applies to internal installation only, outdoor use

will void any warranty

BENEFITS

Improved Pinability: Ecoustic® Panel + Screen features an improved pinability compared to similar panel products.

Lightweight, Easy to Handle + Install: Ecoustic® is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

Designed for the Environment













Building Rating Systems: Ecoustic® Plus will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green Star	LEED	WELL
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	√	√	NA
EPD	√	√	NA
Declare Label	NA	√	NA
Greentag Level A Certification	√	√	√
Toxic Material Reduction	NA	NA	√
Sound Reducing Surfaces 25mm + 50mm	NA	NA	√ ·

HOW TO SPECIFY		
DESIGN	Ecoustic® Plus	
PRODUCT	Panel (Single Side) or 12mm Screen* (Double Side)	
PANEL THICKNESS	8mm, 13.5mm*, 25mm* or 50mm* *minimums apply	
COLOUR	Select from Plus colours	
EDGING	Optional extra - order separately	



Acoustic Performance

The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.

